

PICTURESQUE+ 4303

Picturesque+ 4303 is our range of textured, 2x1 weave screen fabrics, made from PVC coated polyester and available in 12 colours across a broad palette. Our **Picturesque+ 4303** has been designed to offer customers a quality screen range at an optimum price.


TECHNICAL SPECIFICATIONS

- Composition: 30% polyester, 70% PVC
- Weave: 2 x 1
- Openness: 3%
- Fabric weight: 410gsm +/-5%
- Thickness: 0.60mm +/-5%
- Roll widths 250cm and 320cm (see table below).

FR PROPERTIES

FR rating to AS1530Pt3:

- Ignitability Index 14
- Spread of Flame Index 0
- Heat Evolved Index 1
- Smoke Developed Index 7

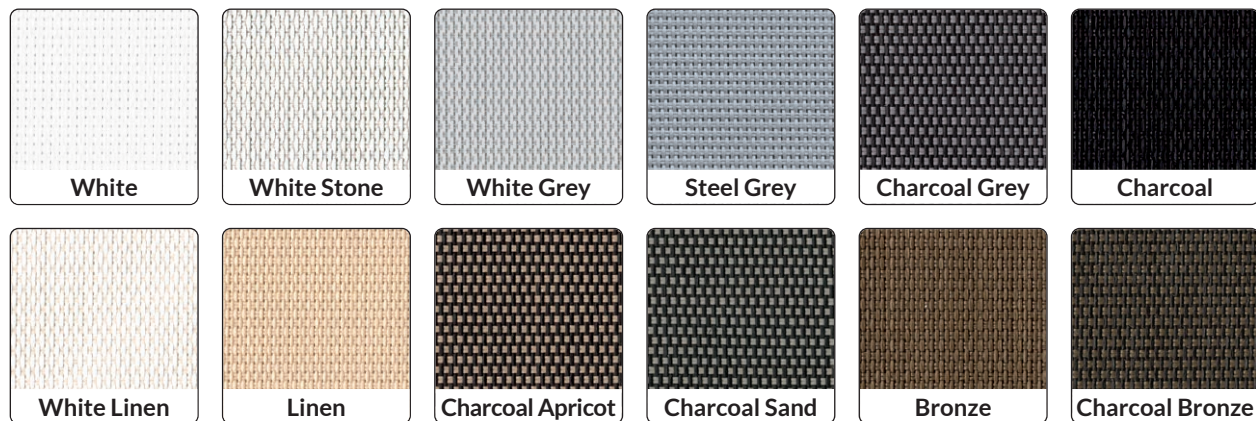

Product codes by colour and width (where available) are outlined below:

COLOUR	WIDTH	
	250CM	320CM
White	71314010	71316010
White Stone	71314092	71316092
White Grey	71314099	71316099
Steel Grey	-	71316840
Charcoal Grey	71314894	71316894
Charcoal	71314880	71316840
White Linen	71314095	71316095
Linen	-	71316720
Charcoal Apricot	71314892	71316892
Charcoal Sand	71314893	71316893
Bronze	-	71316780
Charcoal Bronze	71314896	71316896

PICTURESQUE+ 4303

ROLL LENGTHS

Roll lengths will vary due to the manufacturing process used for this fabric. The nominal roll lengths for each width are shown below. Roll length can vary by +/- 5LM from nominal length.

- 2.5m wide rolls - nominally 25LM
- 3.2m wide rolls - nominally 20LM

POINT-OF-SALE SUPPORT

An integrated swatch of the Copaco **Picturesque+ 4303** and **SunBloc** ranges is available to manufacturers in quantity for their own use or for distribution to their retail customer base.

FABRICATION REQUIREMENTS

There are no special considerations for fabricators when using **Picturesque+ 4303**, except that good quality cutting techniques should be used. It is recommended that **Picturesque+ 4303** is cut using either crush cutting or ultrasonic cutting machinery. Of course, the performance of the fabric will ultimately be determined by the ability of the hardware system to adequately support the fabric with minimum bending and general deformation of the roller tube, especially in wide width installations.

CUT-TO-LENGTH SERVICE

Picturesque+ 4303 is available in cut lengths. Cut lengths are generally despatched within two working days of order and are available for shipment to all parts of Australia.

KEY SELLING FEATURES

Picturesque+ 4303 range has several features that provide competitive advantage over other screen fabric ranges sold in Australia. In particular:

- 12 fast moving colours;
- roll widths of 250cm and 320cm make for maximum cutting efficiency;
- FR rating to AS1530 Pt3;
- 5-year manufacturer's warranty; and
- cost competitive, when compared with fibreglass screens.

PRODUCT WARRANTY

Picturesque+ 4303 is provided with a 5-year manufacturer's warranty, supported directly by Copaco and including for internal and external applications, except when used not in accordance with the manufacturers specifications and when used in tension systems.



copacoscreenweavers
Manufacturer of sunscreen and insectscreen fabrics



Blindware Pty Ltd
 Unit 1/3 Dunlop Crt, Bayswater 3153 Tel: (03) 9876 0400
 Fax: (03) 9720 2746
 Email: sales@blindware.com.au
 Web: www.blindware.com.au

Revision - December 2020
 © 2020 Blindware Pty Ltd

PICTURESQUE+ 4303

ENERGY RATINGS

Energetic and light technical properties (European Standard EN14501)

Glazing A = clear single glazing 4 mm Gv = 0.85

Glazing B = clear double glazing (4/12/4), space filled with air Gv = 0.76

Glazing C = double glazing (4/16/4), with a low emissivity coating in position 3, space filled with argon Gv = 0.59

Glazing D = reflective double glazing (4/16/4), with a low emissivity coating in position 2, space filled with argon Gv = 0.32

Picturesque+ 4303	Solar Energy properties												Visual Properties													
	Fabric			Fabric + Glazing Interior				G-factor = total solar energy transmittance			Fabric + Glazing Interior				Fabric + Glazing Interior				Fabric + Glazing Interior							
	As = Solar Absorbance %	Rs = Solar Reflectance %	Ts = Solar Transmittance %	Glazing A - gv = 0.85 - U = 5.8	Glazing B - gv = 0.76 - U = 2.9	Glazing C - gv = 0.59 - U = 1.2	Glazing D - gv = 0.32 - U = 1.1				Tv = Visible Light Transmittance %	Tuv = UV transmittance %	Direct Solar Transmittance				Qi = Secondary Heat Transfer Factor				Sc = Shading Coefficient					
Colour	As	Rs	Ts	Glazing A - gv = 0.85 - U = 5.8	Glazing B - gv = 0.76 - U = 2.9	Glazing C - gv = 0.59 - U = 1.2	Glazing D - gv = 0.32 - U = 1.1	Tv	Tuv	Glazing A - gv = 0.85 - U = 5.8	Glazing B - gv = 0.76 - U = 2.9	Glazing C - gv = 0.59 - U = 1.2	Glazing D - gv = 0.32 - U = 1.1	Glazing A - gv = 0.85 - U = 5.8	Glazing B - gv = 0.76 - U = 2.9	Glazing C - gv = 0.59 - U = 1.2	Glazing D - gv = 0.32 - U = 1.1	Glazing A - gv = 0.85 - U = 5.8	Glazing B - gv = 0.76 - U = 2.9	Glazing C - gv = 0.59 - U = 1.2	Glazing D - gv = 0.32 - U = 1.1					
White	12.1	68.4	19.5	0.34	0.36	0.35	0.25	16.6	4.1	0.17	0.15	0.12	0.07	0.17	0.21	0.23	0.18	0.40	0.47	0.59	0.78					
White Stone	25.7	55.4	18.9	0.41	0.42	0.39	0.26	14.8	7.1	0.16	0.14	0.11	0.06	0.25	0.28	0.28	0.20	0.49	0.56	0.66	0.81					
White Grey	37.0	47.6	15.4	0.46	0.46	0.42	0.27	11.9	6.2	0.13	0.11	0.09	0.05	0.32	0.35	0.33	0.22	0.54	0.61	0.70	0.83					
Steel Grey	60.0	26.9	13.1	0.57	0.56	0.48	0.29	9.2	6.6	0.11	0.09	0.07	0.04	0.46	0.47	0.41	0.25	0.67	0.74	0.82	0.89					
Charcoal Grey	80.6	10.9	8.5	0.66	0.64	0.53	0.30	7.9	7.4	0.07	0.06	0.04	0.02	0.59	0.58	0.49	0.28	0.78	0.85	0.90	0.94					
Charcoal	90.1	3.5	6.4	0.70	0.68	0.56	0.31	6.4	6.4	0.05	0.04	0.03	0.02	0.65	0.64	0.53	0.29	0.82	0.89	0.94	0.96					
White Linen	22.6	56.6	20.8	0.41	0.42	0.39	0.26	16.6	6.2	0.18	0.16	0.12	0.07	0.23	0.26	0.27	0.19	0.48	0.55	0.66	0.81					
Linen	36.8	42.8	20.4	0.49	0.49	0.43	0.27	14.8	6.5	0.18	0.15	0.11	0.07	0.31	0.34	0.32	0.21	0.58	0.64	0.73	0.85					
Charcoal Sand	79.2	12.4	8.4	0.65	0.64	0.53	0.30	7.8	6.7	0.07	0.06	0.04	0.02	0.58	0.58	0.49	0.27	0.77	0.84	0.90	0.93					
Charcoal Apricot	76.9	13.5	9.6	0.65	0.63	0.53	0.30	8.8	7.7	0.08	0.07	0.05	0.03	0.57	0.56	0.48	0.27	0.76	0.83	0.89	0.93					
Bronze	77.5	12.4	10.1	0.65	0.64	0.53	0.30	8.0	7.5	0.08	0.07	0.05	0.03	0.57	0.57	0.48	0.27	0.77	0.84	0.90	0.93					
Charcoal Bronze	85.5	6.5	8.0	0.69	0.67	0.55	0.30	7.6	7.5	0.07	0.06	0.04	0.02	0.62	0.61	0.51	0.28	0.81	0.88	0.93	0.95					

