


PRODUCT OVERVIEW

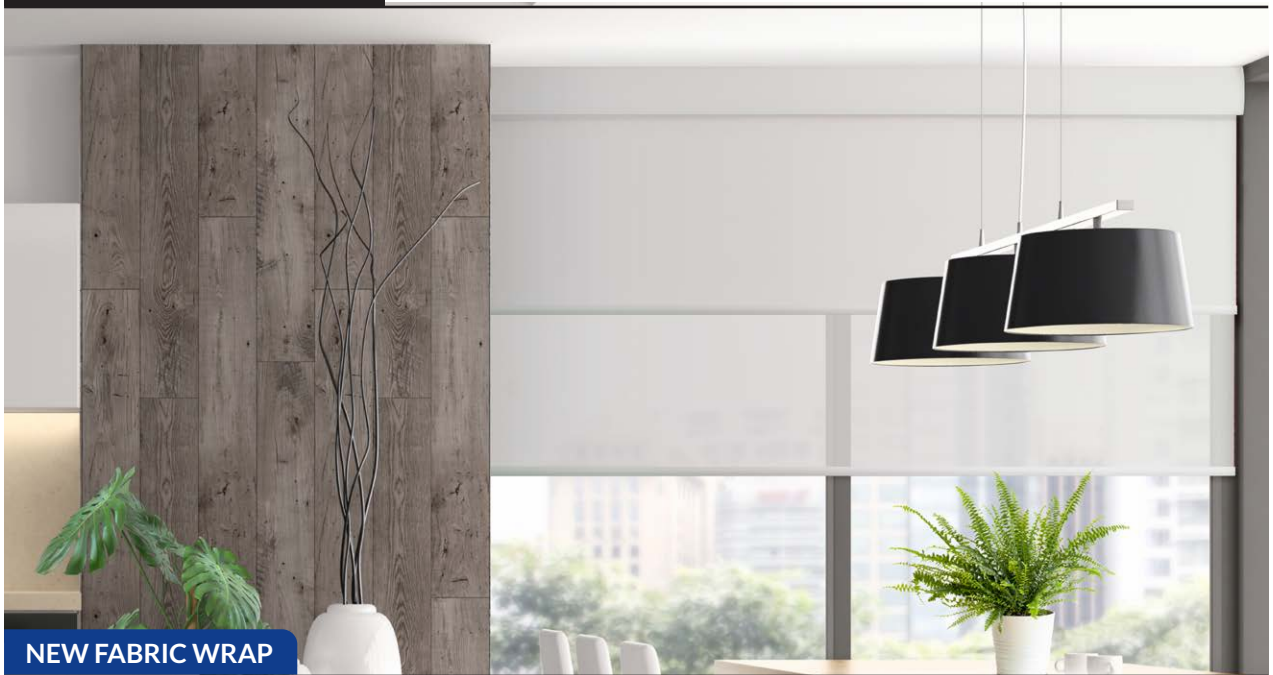

The **SunBoss** Double Fascia finishes a dual roller blind system perfectly, allowing residential or commercial users to maintain a designer look across the entire room decor. The fascia profile seamlessly covers both blinds and can be easily fabric wrapped, so it perfectly matches the blind fabric.

With trademark **SunBoss** flexibility, the 2 piece double fascia can be easily installed semi-recess, full-recess or face fit applications. There is no notching required during manufacture and there is a wide range of centre bracket options available. Of course, the double fascia works perfectly with **SunBoss** chain operated clutches, **ZeroGravity** chainless and motorised roller blinds.


FEATURES & BENEFITS

FLEXIBLE, HIGH QUALITY BRACKETS	<ul style="list-style-type: none"> • Mounting brackets can be ceiling, wall or side mounted and allow the control side to be either side, including mixed sides for 2x blinds
FABRIC WRAP OPTION	<ul style="list-style-type: none"> • Front profile can be quickly and easily wrapped with any fabric to match the roller blind fabric without using double sided tape • Wrapping is completely seamless- no visible gaps, bulges or lines • Simple method to fix the fabric securely • Width of fabric required for wrapping = 270mm
VERSATILE BLIND CONFIGURATIONS	<ul style="list-style-type: none"> • Blind drive can be installed on either mounting bracket <i>Note: Front blind *must be* reverse rolled. Back blind can be regular or reverse rolled.</i>
COLOUR MATCHING BRACKET COVERS	<ul style="list-style-type: none"> • Provides a finished look for semi-recess and outside wall mounted applications (colours match mounting brackets and bottom bar end caps)
CLIP ON DESIGN	<ul style="list-style-type: none"> • The Fascia top profile securely locks onto each bracket, with a separate front profile that clips onto the top profile and can be removed to allow access to the blind
CHAIN GUARD	<ul style="list-style-type: none"> • End covers are fitted with EVA noise absorbing pads that reduce chain noise from contact with the end caps
WIDE RANGE OF LIFT OPTIONS	<ul style="list-style-type: none"> • Blinds can be operated using: <ul style="list-style-type: none"> - SunBoss clutch - ZeroGravity - Spring Blind - Motorised
MULTI-LINKED	<ul style="list-style-type: none"> • SunBoss Multi-Link system is compatible with the Double Fascia using same components as open roll blinds. Allows a group shades to be linked together and driven by a single clutch or motor. Each link can be adjusted to align and level the bottom bars together
AUTOMATION OPTIONS	<ul style="list-style-type: none"> • Allows for motorised controls with wireless remotes, switches or other smart devices



DIMENSIONS

All Dimensions Are In Millimetres (Inches)

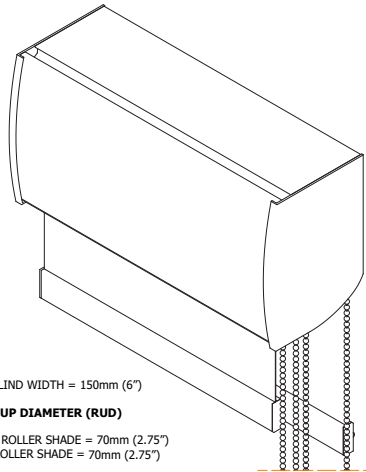

MINIMUM BLIND WIDTH = 150mm (6")

MAX ROLL UP DIAMETER (RUD)

- FRONT ROLLER SHADE = 70mm (2.75")
- BACK ROLLER SHADE = 70mm (2.75")

LIGHT GAPS (APPROXIMATE)

Without Covers	12mm (0.5")	18mm (0.7")
With Covers	14mm (0.55")	20mm (0.8")

CASSETTE AND COVER COLOURS:

- WHITE
- CLEAR ANODISED
- BLACK

SIDE VIEW
120mm (4.7")
163mm (6.4")

MOUNTING BRACKET
22mm (0.8")

FRONT SHADE - FRONT ROLL
BACK SHADE - BACK ROLL
Max Roll Diameter 70mm (2.75")
90mm (3.5")

FRONT SHADE - FRONT ROLL
BACK SHADE - FRONT ROLL
Max Roll Diameter 70mm (2.75")
70mm (2.75")
20mm (0.8")

MOUNTING DIMENSIONS

All Dimensions Are In Millimetres (Inches)

CEILING MOUNT VIEW
A
B
MULLION
GLAZING

WALL MOUNT VIEW
CEILING
C
D
MULLION
GLAZING

LATERAL MOUNT VIEW
E
F
INSIDE FRAME

A = MEASUREMENT FROM WALL FACE TO FURTHEST SCREW
D = MEASUREMENT FROM CEILING FACE TO FURTHEST SCREW
F = MEASUREMENT FROM CEILING FACE TO FURTHEST SCREW

COVERS CANNOT BE USED FOR LATERAL MOUNT APPLICATIONS

Fascia Front & Mounting Brackets Considered							
System	Bracket Type	A	B	C	D	E	F
100mm Fascia	Mill Finish: 506321000	41.3mm (1.6")	15.9mm (0.6")	15.9mm (0.6")	76.2mm (3")	9.5mm (0.4")	69.9mm (2.75")
	White: 506321001						
	Cream: 506321003						
	Black: 506321890						
	C/Anodised: 506321901						

DOUBLE FASCIA SPEC SHEET



Clutches: Use 32mm, 38mm FastRise, 38mm Direct Drive and 38mm Geared
Motorised: Motolux Gen3 motors - add 3mm to clutch end only
Pin Ends: Use standard
Tube Adapters: Use 43mm and 50mm as needed

NOTE: DIMENSIONS "F1" RELATES TO RECOMMENDED FABRIC DEDUCTIONS.

Tube Dia.	A	B	F1
38mm	17mm	11mm	29mm
43mm	19mm	12mm	29mm
50mm	17mm	11mm	29mm

DIMENSION 'B'		
TIGHT	IDEAL	LOOSE
6mm		15mm
8mm		16mm
6mm		15mm

ORDERING INFORMATION

COMPONENT	COLOUR							MAX ROLL DIAMETER (mm)	PACK QUANTITY
	MILL FINISH	WHITE	CREAM	BEIGE	GREY	BLACK	ANODISED		
Curved Double Fascia	506321000	506321001	506321003	N/A	N/A	506321890	506321901	70mm	3 sets
End Cover	N/A	506362001	506362003	N/A	N/A	506362890	506362901	N/A	10 pairs
Flange Clip	N/A	N/A	N/A	N/A	N/A	N/A	506331830	N/A	50pcs
Fabric Clip	N/A	N/A	N/A	N/A	N/A	N/A	506332830	N/A	50pcs
Centre Link Bracket	N/A	504482001	504482003	504482711	504482830	504482890	N/A	70mm	100pcs
Double Bracket Vertical Compact	N/A	504252001	504252003	504252711	504252830	504252890	N/A	70mm	50pcs
Chain Diverter Kit	N/A	50619001-3	N/A	N/A	50619830-3	50619890-3	504422890-2	N/A	25 kits

INSTALLATION ANIMATION

See the QR Code for an animation illustrating how to install the Double Fascia.



Blindware Pty Ltd
 Unit 1/3 Dunlop Crt, Bayswater 3153
 Tel: (03) 9876 0400 Fax: (03) 9720 2746
 Email: sales@blindware.com.au